


SLITTER REWINDER
DUPLEX

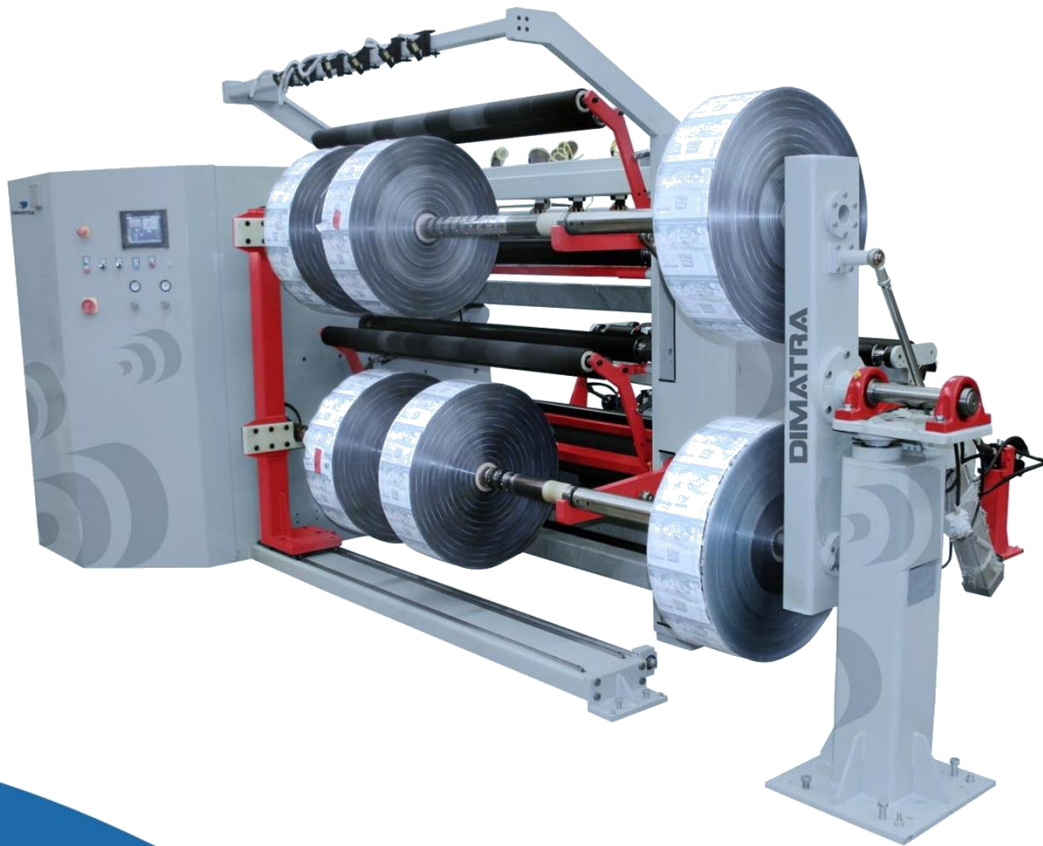

Slitter Rewinder Duplex

Machine designed to slit and rewind plastic film, label and paper.

Designed to stop automatically at the defined diameter or length. **This machine operates with: cellophane, PET, PE, PVC, BOPP, CPP, BOPA, PP and laminated products.**

PROCESS

- Shaftless unwinder with 3" to 6" chucks.
- Web guide system.
- Anti static bars.
- Razor slitting system.
- 3" differential friction shafts for rewinding.
- F-type holder for easy unloading.

TECHNICAL SPECIFICATIONS

- Unwinder diameter: 1,000 mm (39").
- Standard widths: 1,000 mm (39") - 1,300 mm (51") - 1,600 mm (62").
- Rewinder diameter: 800 mm (31").
- Minimum slitting width: 38 mm (1.5").
- Speed: 800 m/min (2,624.67 ft/min).

OPTIONALS

- Shear slitting system.
- Trim extractor.
- Manual or semi-automatic core positioning laser system.
- Rewind roll unloader.
- Differential rings with different diameters and widths.
- Remote connection for fast troubleshooting.

SERVICES

- After-sales service.
- Technical support.
- Spare parts sales..