


SHRINKING SLEEVE
SIMPLEX INSPECTION

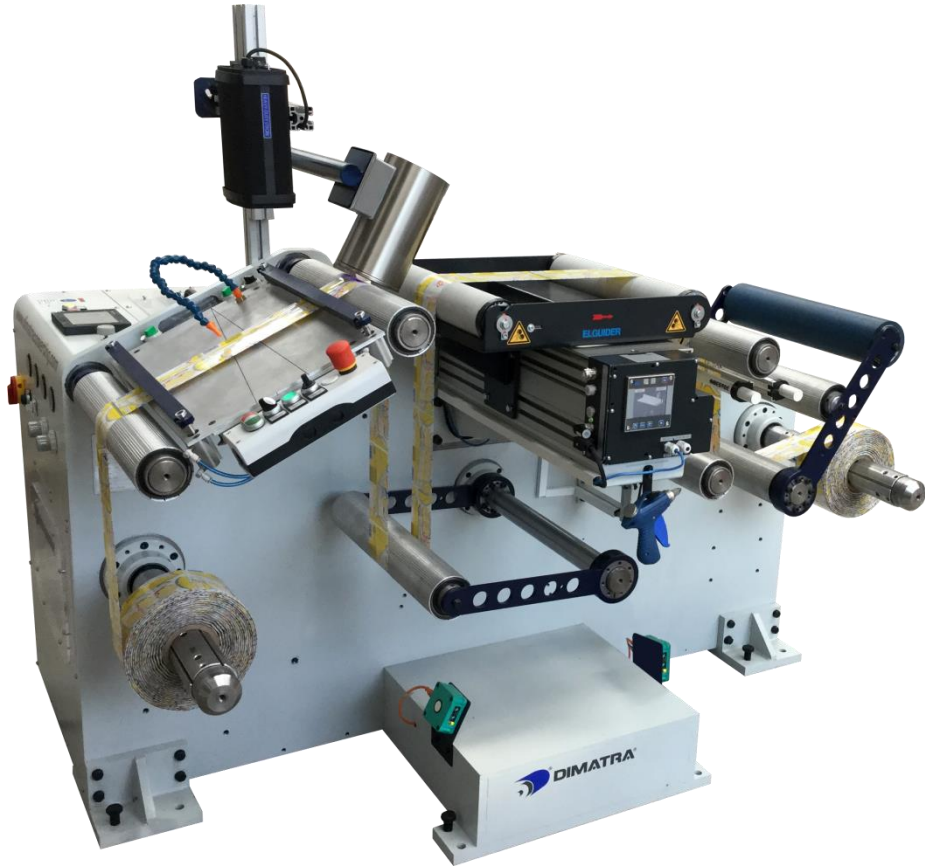

Shrinking Sleeve Simplex Inspection

Rewinding machine for material inspection. **Operates in forward and backward directions.**

Designed to work as a inspection machine for shrink sleeve to check sealing, printing and rewinding with oscillation.

PROCESS

- Central unwinding system with a 3" inflatable shaft.
- Central rewinding system with a 3" inflatable shaft.
- Inspection table for splicing and inspection of materials.
- Taper tension rewinder.
- Web guide system.

TECHNICAL SPECIFICATIONS

- Unwind diameter : 600 mm (24").
- Rewind diameter: 600 mm (24").
- Max width: 400 mm (15.75").
- Speed: 500 m/min (1,640 ft/min).

***Eco inspection machine, technical specifications: Speed 200 m/min, width 400mm, Unwind and rewind diameter 600mm.*

OPTIONALS

- Inspection system through a video camera or stroboscope.
- Adapters for different core diameter in unwinder and winder.
- Remote connection for fast troubleshooting.

SERVICES

- After-sales service.
- Technical support.
- Spare parts sales.